



SANtricity® System Manager 11.30

Installing and Configuring for VMware

Express Guide

August 2016 | 215-11224_A0
doccomments@netapp.com

 **NetApp®**

Contents

Deciding whether to use this Express Guide	4
Understanding the workflow	6
Verifying the configuration is supported	7
Configuring IP addresses using DHCP	10
Configuring the multipath software	11
Performing FC-specific tasks	12
Configuring the switches—FC	12
Determining the host port WWPNs—FC	12
Performing iSCSI-specific tasks	14
Configuring the switches—iSCSI	14
Configuring networking—iSCSI	14
Configuring array-side networking—iSCSI	15
Configuring host-side networking—iSCSI	17
Verifying IP network connections—iSCSI	18
Performing SAS-specific tasks	19
Accessing SANtricity System Manager and using Setup wizard	20
Discovering storage on the host	22
Configuring storage on the host	23
Verifying storage access on the host	24
FC worksheet	25
iSCSI worksheet	27
SAS worksheet	28
Where to find additional information	29
Copyright information	30
Trademark information	31
How to send comments about documentation and receive update notifications	32

Deciding whether to use this Express Guide

The "express method" for installing your storage array and accessing SANtricity System Manager is appropriate for setting up a standalone VMware host to an E-Series storage system. It is designed to get the storage system up and running as quickly as possible with minimal decision points.

Note: The configuration that the express method provides might not meet the needs of your production environment. For additional options for installing and configuring the storage system, see the SANtricity Power Guide for your operating system.

The express method includes the following steps:

1. Setting up one of the following communication environments:
 - Fibre Channel (FC)
 - iSCSI
 - SAS
2. Creating logical volumes on the storage array and assigning a logical unit number (LUN) to each volume.
3. Making the volume LUNs available to the data host.

This guide is based on the following assumptions:

Component	Assumptions
Hardware	<ul style="list-style-type: none"> • You have used the Installation and Setup Instructions included with the controller shelves to install the hardware. • You have connected cables between the optional drive shelves and the array controllers. • You have applied power to the storage array. • You have installed all other hardware (for example, management station, switches) and made the necessary connections.
Host	<ul style="list-style-type: none"> • You have made a connection between the storage array and the data host. • You have installed the host operating system. • You are not using VMware as a virtualized guest. • You are not configuring the data (I/O attached) host to boot from SAN.
Storage management station	<ul style="list-style-type: none"> • You are using a 1 Gb/s or faster management network. • You are using a separate station for management rather than the data (I/O attached) host. • You are using out-of-band management, in which a storage management station sends commands to the storage array through the Ethernet connections to the controller. • You have attached the management station to the same subnet as the storage management ports.

Component	Assumptions
IP addressing	<ul style="list-style-type: none"> • You have installed and configured a DHCP server. • You have not yet made an Ethernet connection between the management station and the storage array.
Storage provisioning	<ul style="list-style-type: none"> • You will not use shared volumes. • You will create pools rather than volume groups.
Protocol: FC	<ul style="list-style-type: none"> • You have made all host-side FC connections and activated switch zoning. • You are using NetApp-supported FC HBAs and switches. • You are using FC HBA driver versions as listed on the NetApp Interoperability Matrix Tool.
Protocol: iSCSI	<ul style="list-style-type: none"> • You are using Ethernet switches capable of transporting iSCSI traffic. • You have configured the Ethernet switches according to the vendor's recommendation for iSCSI.
Protocol: SAS	<ul style="list-style-type: none"> • You are using NetApp-supported SAS HBAs. • You are using SAS HBA driver versions as listed on the NetApp Interoperability Matrix Tool.

If these assumptions are not correct for your installation, or if you want more conceptual background information, see the SANtricity Power Guide for your operating system.


Related information

[NetApp Interoperability Matrix Tool](#)

[SANtricity 11.30 Installing and Configuring for VMware Power Guide for Advanced Users](#)

Understanding the workflow

This workflow guides you through the "express method" for configuring your storage array and SANtricity System Manager to make storage available to a host.

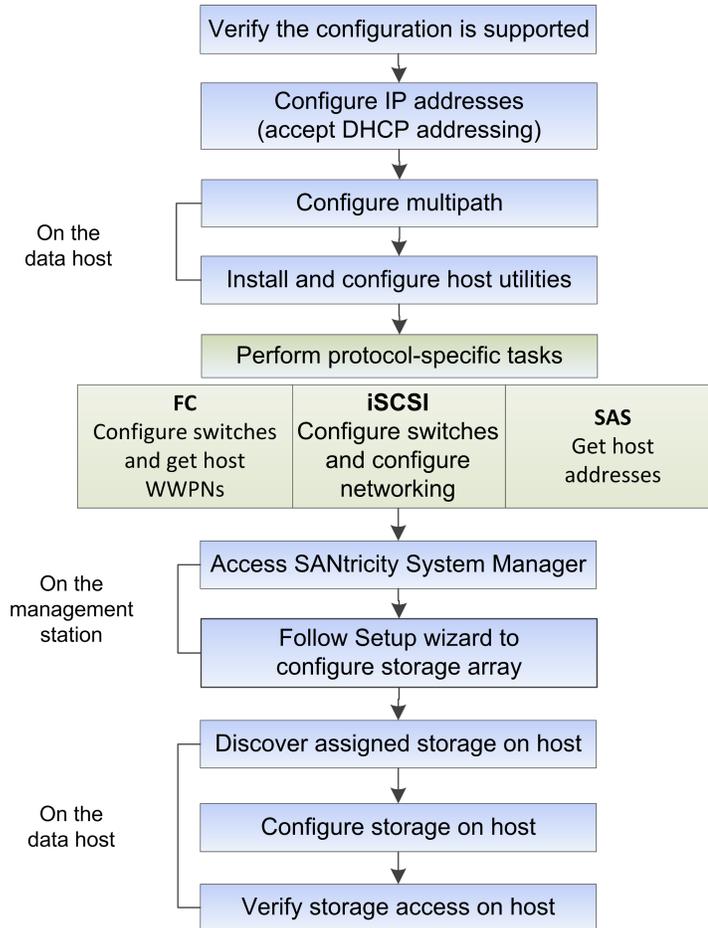


Verifying the configuration is supported


To ensure reliable operation, you create an implementation plan and then use the NetApp Interoperability Matrix Tool (IMT) to verify that the entire configuration is supported.

Steps

1. Go to the [NetApp Interoperability Matrix Tool](#).
2. Go to **Help > Online Help | Training** or **Help > What's New | FAQ** for training or refresher tools.

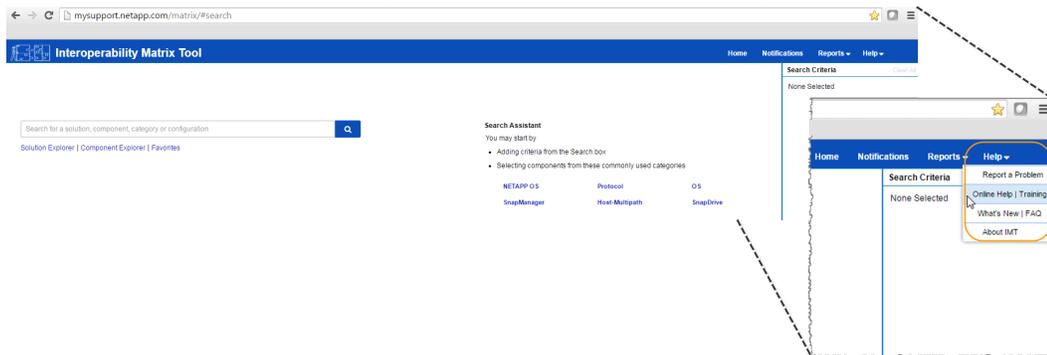

3. Use the search functions to enter the details of your configuration.

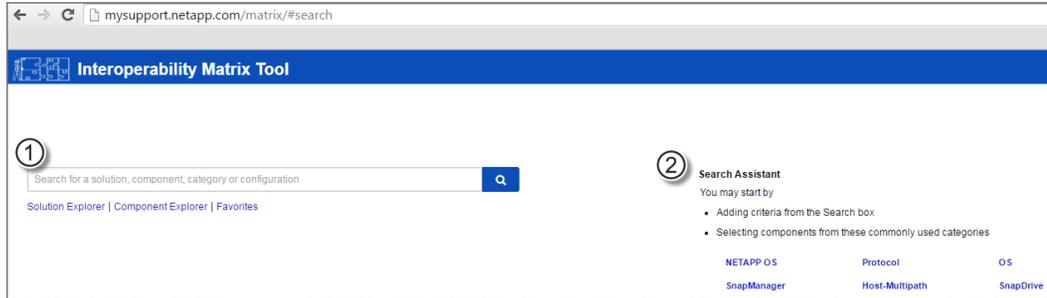


- | | |
|---|---|
| 1 | Search box: Enter a solution, component, category, or configuration for building initial criteria and inferring solutions. |
| 2 | Search Assistant: Use appropriate hints to infer solutions faster. |

4. Click **View What Works With What** to select from a detailed matrix of components.



Example

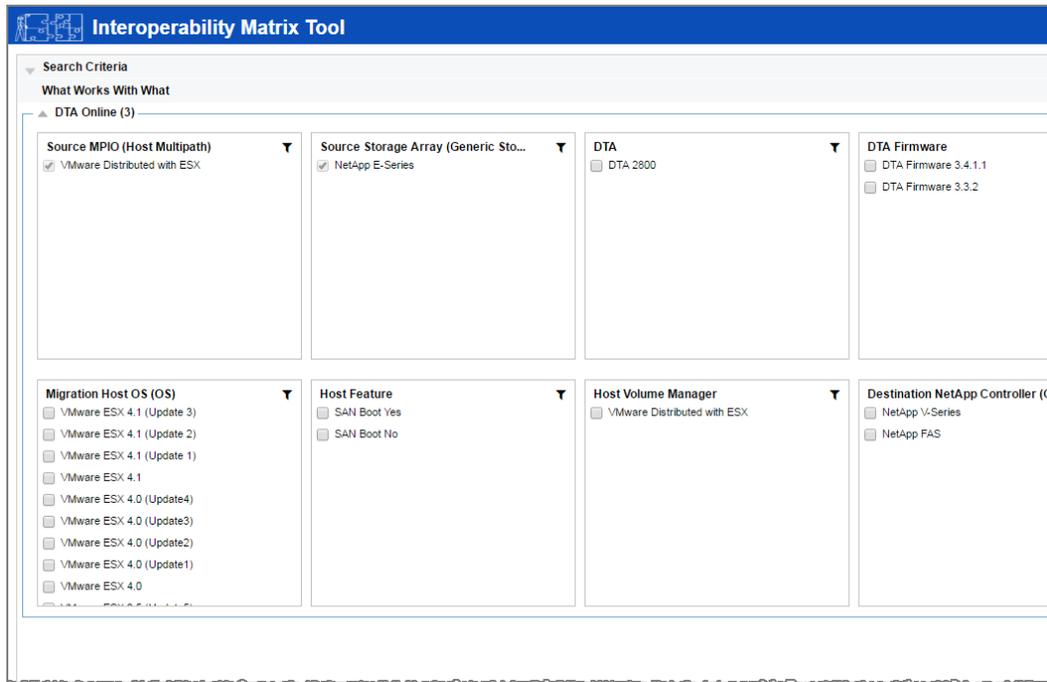

5. Review the information in the following tabs in the **Configuration Details** window:
 - **Notes:** Lists important information specific to your configuration. Review the alerts to identify the hot fixes that are required for your operating system.
 - **Policies & Guidelines:** Provides general guidelines for all SAN configurations.
6. As necessary, make the updates for your operating system and protocol as listed in the table.

Operating system updates	Protocol	Protocol-related updates
<ul style="list-style-type: none"> You might need to install out-of-box drivers to ensure proper functionality and supportability. You can install HBA drivers using the ESXi shell or a remote SSH connection to the ESXi host. To access the host using either of those methods, you must enable the ESXi shell and SSH access. For more information about the ESXi shell, refer to the VMware Knowledge Base regarding using the ESXi shell in ESXi 5.x or 6.x. For installation commands, refer to the instructions that accompany the HBA drivers. Each HBA vendor has specific methods for updating boot code and firmware. Some of these methods could include the use of a vCenter plugin or the installation of CIM provider on the ESXi host. Refer to the support section of the vendor's website to obtain the instructions and software necessary to update the HBA boot code or firmware. Refer to the <i>VMware Compatibility Guide</i> or the HBA vendor's website to obtain the correct boot code or firmware. 	FC	Host bus adapter (HBA) driver, firmware, and bootcode
	iSCSI	Network interface card (NIC) driver, firmware and bootcode
	SAS	Host bus adapter (HBA) driver, firmware, and bootcode

Related information

[NetApp Interoperability Matrix Tool](#)

[VMware Knowledge Base](#)

Configuring IP addresses using DHCP

In this express method for configuring communications between the management station and the storage array, you use Dynamic Host Configuration Protocol (DHCP) to provide IP addresses. Each storage array has either one controller (simplex) or two controllers (duplex), and each controller has two storage management ports. Each management port will be assigned an IP address.

Before you begin

You have installed and configured a DHCP server on the same subnet as the storage management ports.

About this task

The following instructions refer to a storage array with two controllers (a duplex configuration).

Steps

1. If you have not already done so, connect an Ethernet cable to the management station and to management port 1 on each controller (A and B).

The DHCP server assigns an IP address to port 1 of each controller.

Note: Do not use management port 2 on either controller. Port 2 is reserved for use by NetApp technical personnel.

Important: If you disconnect and reconnect the Ethernet cable, or if the storage array is power-cycled, DHCP assigns IP addresses again. This process occurs until static IP addresses are configured. It is recommended that you avoid disconnecting the cable or power-cycling the array.

If the storage array cannot get DHCP-assigned IP addresses within 30 seconds, the following default IP addresses are set:

- Controller A, port 1: 192.168.128.101
 - Controller B, port 1: 192.168.128.102
 - Subnet mask: 255.255.255.0
2. Locate the MAC address label on the back of each controller, and then provide your network administrator with the MAC address for port 1 of each controller.

Your network administrator needs the MAC addresses to determine the IP address for each controller. You will need the IP addresses when you add the storage array to SANtricity Storage Manager.

Configuring the multipath software

Multipath software provides a redundant path to the storage array in case one of the physical paths is disrupted. The multipath software presents the operating system with a single virtual device that represents the active physical paths to the storage. The multipath software also manages the failover process that updates the virtual device. For VMware, you use the inbox Native Multipathing Plug-in (NMP).

VMware provides plug-ins, known as Storage Array Type Plug-ins (SATP), to handle the failover implementations of specific vendors' storage arrays. The SATP you should use is VMW_SATP_ALUA.

For additional information, see [SANtricity 11.30 Installing and Configuring for VMware Power Guide for Advanced Users](#).

Performing FC-specific tasks

For the Fibre Channel protocol, you configure the switches and determine the host port identifiers.

Configuring the switches—FC

Configuring (zoning) the Fibre Channel (FC) switches enables the hosts to connect to the storage array and limits the number of paths. You zone the switches using the management interface for the switches.

Before you begin

- You must have administrator credentials for the switches.
- You must have used your HBA utility to discover the WWPN of each host initiator port and of each controller target port connected to the switch.

Note: It is helpful to record the WWPNs on the [FC worksheet](#) on page 25.

About this task

For details about zoning your switches, see the switch vendor's documentation.

You must zone by WWPN, not by physical port. Each initiator port must be in a separate zone with all of its corresponding target ports.

Steps

1. Log in to the FC switch administration program, and then select the zoning configuration option.
2. Create a new zone that includes the first host initiator port and that also includes all of the target ports that connect to the same FC switch as the initiator.
3. Create additional zones for each FC host initiator port in the switch.
4. Save the zones, and then activate the new zoning configuration.

Determining the host port WWPNs—FC

To configure FC zoning, you must determine the worldwide port name (WWPN) of each initiator port.

Steps

1. Connect to the ESXi host using SSH or the ESXi shell.
2. Run the following command:

```
esxcfg-scsidevs -a
```

3. Record the initiator identifiers. The output will be similar to this example:

```
vmhba3 lpfc link-up fc.20000090fa05e848:10000090fa05e848
(0000:03:00.0)
Emulex Corporation Emulex LPe16000 16Gb PCIe Fibre Channel Adapter
vmhba4 lpfc link-up fc.20000090fa05e849:10000090fa05e849
```

```
(0000:03:00.1)  
Emulex Corporation Emulex LPe16000 16Gb PCIe Fibre Channel Adapter
```

Related concepts

[FC worksheet](#) on page 25

Performing iSCSI-specific tasks

For the iSCSI protocol, you configure the switches and configure networking on the array side and the host side. Then you verify the IP network connections.

Configuring the switches—iSCSI

You configure the switches according to the vendor's recommendations for iSCSI. These recommendations might include both configuration directives as well as code updates.

You must ensure the following:

- You have two separate networks for high availability. Make sure that you isolate your iSCSI traffic to separate network segments.
- You have enabled send and receive hardware flow control **end to end**.
- You have disabled priority flow control.
- If appropriate, you have enabled jumbo frames.

Note: Port channels/LACP is not supported on the controller's switch ports. Host-side LACP is not recommended; multipathing provides the same, and in some cases better, benefits.

Related concepts

[iSCSI worksheet](#) on page 27

Configuring networking—iSCSI

You can set up your iSCSI network in many ways, depending on your data storage requirements.

Consult your network administrator for tips on selecting the best configuration for your environment.

While planning your iSCSI networking, remember that the VMware Configuration Maximums guides state that the maximum supported iSCSI storage paths is 8. You must consider this requirement to avoid configuring too many paths.

By default, the VMware iSCSI software initiator creates a single session per iSCSI target when you are not using iSCSI port binding.

Note: VMware iSCSI port binding is a feature that forces all bound VMkernel ports to log into all target ports that are accessible on the configured network segments. It is meant to be used with arrays that present a single network address for the iSCSI target. NetApp recommends that iSCSI port binding not be used. For additional information, see the [VMware Knowledge Base](#) for the article regarding considerations for using software iSCSI port binding in ESX/ESXi. If the ESXi host is attached to another vendor's storage, NetApp recommends that you use separate iSCSI vmkernel ports to avoid any conflict with port binding.

To ensure a good multipathing configuration, use multiple network segments for the iSCSI network. Place at least one host-side port and at least one port from each array controller on one network segment, and an identical group of host-side and array-side ports on another network segment. Where possible, use multiple Ethernet switches to provide additional redundancy.

You must enable send and receive hardware flow control **end to end**. You must disable priority flow control.

If you are using jumbo frames within the IP SAN for performance reasons, make sure to configure the array, switches, and hosts to use jumbo frames. Consult your operating system and switch documentation for information on how to enable jumbo frames on the hosts and on the switches. To enable jumbo frames on the array, complete the steps in *Configuring array-side networking—iSCSI*.

Note: Many network switches have to be configured above 9,000 bytes for IP overhead. Consult your switch documentation for more information.

Related tasks

[Configuring array-side networking—iSCSI](#) on page 15

Configuring array-side networking—iSCSI

You use the SANtricity System Manager GUI to configure iSCSI networking on the array side.

Before you begin


- You must know the IP address or domain name for one of the storage array controllers.
- You or your system administrator must have set up a password for the System Manager GUI.

About this task

This task describes how to access the iSCSI port configuration from the Hardware page. You can also access the configuration from **System > Settings > Configure iSCSI ports**.

Steps

1. From your browser, enter the following URL:
`https://<DomainNameOrIPAddress>`
 IPAddress is the DHCP-assigned address for one of the storage array controllers.
 The login page for the System Manager GUI appears.
2. Enter the System Manager password.
 When you open System Manager and no pools, volumes groups, workloads, or notifications have been configured, the Setup wizard launches.
3. For now, close the Setup wizard.
 You will use the wizard later to complete additional setup tasks.
4. Select **Hardware**.
5. If the graphic shows the drives, click **Show back of shelf**.
 The graphic changes to show the controllers instead of the drives.
6. Click the controller with the iSCSI ports you want to configure.
 The controller's context menu appears.
7. Select **Configure iSCSI ports**.

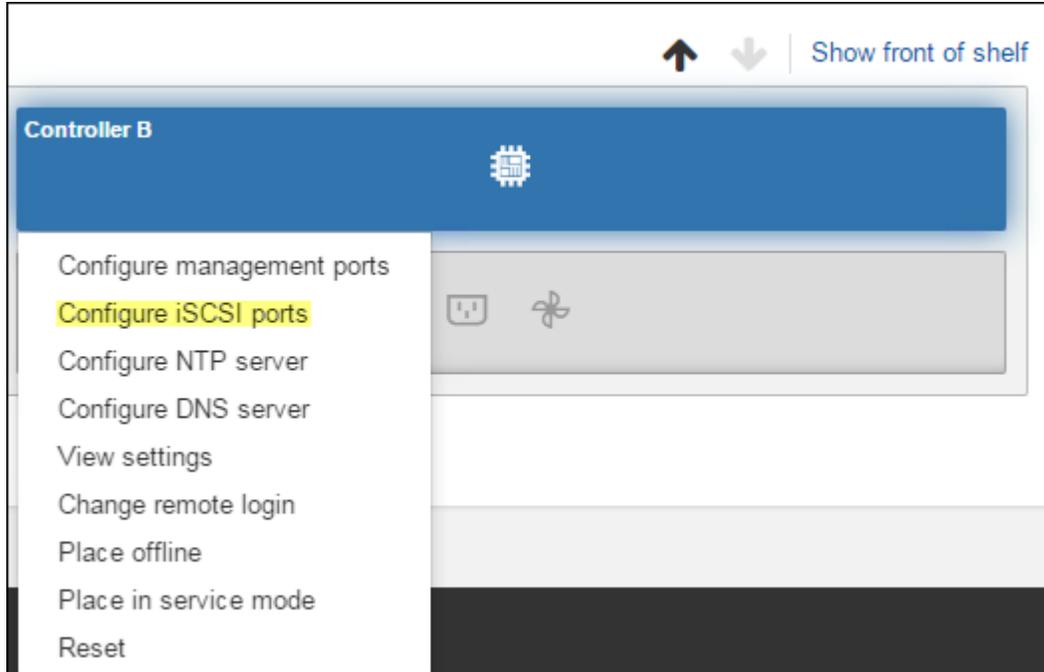

The Configure iSCSI Ports dialog box opens.

8. In the drop-down list, select the port you want to configure, and then click **Next**.
9. Select the configuration port settings, and then click **Next**.

To see all port settings, click the **Show more port settings** link on the right of the dialog box.

Port Setting	Description
Configured ethernet port speed	Select the desired speed. The options that appear in the drop-down list depend on the maximum speed that your network can support (for example, 10 Gb/s).
Enable IPv4 / Enable IPv6	Select one or both options to enable support for IPv4 and IPv6 networks.
TCP listening port (Available by clicking Show more port settings .)	If necessary, enter a new port number. The listening port is the TCP port number that the controller uses to listen for iSCSI logins from host iSCSI initiators. The default listening port is 3260. You must enter 3260 or a value between 49152 and 65535.
MTU size (Available by clicking Show more port settings .)	If necessary, enter a new size in bytes for the Maximum Transmission Unit (MTU). The default Maximum Transmission Unit (MTU) size is 1500 bytes per frame. You must enter a value between 1500 and 9000.
Enable ICMP PING responses	Select this option to enable the Internet Control Message Protocol (ICMP). The operating systems of networked computers use this protocol to send messages. These ICMP messages determine whether a host is reachable and how long it takes to get packets to and from that host.

If you selected **Enable IPv4**, a dialog box opens for selecting IPv4 settings after you click **Next**.
If you selected **Enable IPv6**, a dialog box opens for selecting IPv6 settings after you click **Next**.

If you selected both options, the dialog box for IPv4 settings opens first, and then after you click **Next**, the dialog box for IPv6 settings opens.

10. Configure the IPv4 and/or IPv6 settings, either automatically or manually. To see all port settings, click the **Show more settings** link on the right of the dialog box.

Port setting	Description
Automatically obtain configuration	Select this option to obtain the configuration automatically.
Manually specify static configuration	Select this option, and then enter a static address in the fields. For IPv4, include the network subnet mask and gateway. For IPv6, include the routable IP address and router IP address.
Enable VLAN support (Available by clicking Show more settings .)	Select this option to enable a VLAN and enter its ID. A VLAN is a logical network that behaves like it is physically separate from other physical and virtual local area networks (LANs) supported by the same switches, the same routers, or both.
Enable ethernet priority (Available by clicking Show more settings .)	Select this option to enable the parameter that determines the priority of accessing the network. Use the slider to select a priority between 1 and 7. In a shared local area network (LAN) environment, such as Ethernet, many stations might contend for access to the network. Access is on a first-come, first-served basis. Two stations might try to access the network at the same time, which causes both stations to back off and wait before trying again. This process is minimized for switched Ethernet, where only one station is connected to a switch port.

11. Click **Finish**.
12. Close System Manager.

You will use System Manager to configure you storage in [Accessing SANtricity System Manager and using Setup wizard](#) on page 20. For the Setup wizard to appear again, you must close and re-open System Manager or refresh your browser.

Configuring host-side networking—iSCSI

Configuring iSCSI networking on the host side enables the VMware iSCSI initiator to establish a session with the array.

About this task

In this "express method" for configuring iSCSI networking on the host side, you allow the ESXi host to carry iSCSI traffic over four redundant paths to the storage.

After you complete this task, the host is configured with a single vSwitch containing both VMkernel ports and both VMNICs.

For additional information on configuring iSCSI networking for VMware, see the vSphere Documentation Center for your version of vSphere.

Steps

1. Configure the switches that will be used to carry iSCSI storage traffic.
2. Enable send and receive hardware flow control **end to end**.

3. Disable priority flow control.
4. Complete the array side iSCSI configuration.
5. Use two NIC ports for iSCSI traffic.
6. Use either the vSphere client or vSphere web client to perform the host-side configuration.

The interfaces vary in functionality and the exact workflow will vary.

Verifying IP network connections—iSCSI

You verify Internet Protocol (IP) network connections by using ping tests to ensure the host and array are able to communicate.

Steps

1. On the host, run one of the following commands, depending on whether jumbo frames are enabled:

- If jumbo frames are not enabled, run this command:

```
vmkping <iSCSI_target_IP_address>
```

- If jumbo frames are enabled, run the ping command with a payload size of 8,972 bytes. The IP and ICMP combined headers are 28 bytes, which when added to the payload, equals 9,000 bytes. The `-s` switch sets the `packet_size` bit. The `-d` switch sets the DF (Don't Fragment) bit on the IPv4 packet. These options allow jumbo frames of 9,000 bytes to be successfully transmitted between the iSCSI initiator and the target.

```
vmkping -s 8972 -d <iSCSI_target_IP_address>
```

In this example, the iSCSI target IP address is 192.0.2.8.

```
vmkping -s 8972 -d 192.0.2.8
Pinging 192.0.2.8 with 8972 bytes of data:
Reply from 192.0.2.8: bytes=8972 time=2ms TTL=64
Ping statistics for 192.0.2.8:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 2ms, Maximum = 2ms, Average = 2ms
```

2. Issue a `vmkping` command from each host's initiator address (the IP address of the host Ethernet port used for iSCSI) to each controller iSCSI port. Perform this action from each host server in the configuration, changing the IP addresses as necessary.

Note: If the command fails with the message `sendto() failed (Message too long)`, verify the MTU size (jumbo frame support) for the Ethernet interfaces on the host server, storage controller, and switch ports.

3. Return to the iSCSI Configuration procedure to finish target discovery.

Performing SAS-specific tasks

For the SAS protocol, you determine host port addresses and make the settings recommended in the Notes column of the *NetApp Interoperability Matrix Tool (IMT)*.

About this task

Guidelines for HBA utilities

- Most HBA vendors offer an HBA utility. Depending on your host operating system and CPU, use either the LSI-sas2flash(6G) or sas3flash(12G) utility.
- It is helpful to record the SAS addresses on the *SAS worksheet* on page 28.
- Host I/O ports might automatically register if the host context agent is installed.

Steps

1. Download the LSI-sas2flash(6G) or sas3flash(12G) utility from your HBA vendor's web site.
2. Install the utility.
3. Record the host identifiers (SAS addresses) on the *SAS worksheet* on page 28.
4. Use the HBA BIOS to select the appropriate settings for your configuration.
See the Notes column of the *NetApp Interoperability Matrix Tool* for recommendations.

Related concepts

SAS worksheet on page 28

Accessing SANtricity System Manager and using Setup wizard

You use the Setup wizard in SANtricity System Manager to configure your storage array.

Before you begin

- You have ensured that the device from which you will access SANtricity System Manager contains one of the following browsers:

Browser	Minimum version
Google Chrome	42
Microsoft Internet Explorer	11
Microsoft Edge	2.0
Mozilla Firefox	24
Safari	6

- You are using out-of-band management.

About this task

If you are an iSCSI user, you closed the Setup wizard while configuring iSCSI.

The wizard automatically relaunches when you open System Manager or refresh your browser and *at least one* of the following conditions is met:

- 0 pools and volume groups are detected.
- 0 workloads are detected.
- 0 notifications are configured.

If the Setup wizard does not automatically appear, contact technical support.

Important: System Manager allows you to manage just your E2800 storage array. You need SANtricity Storage Manager to manage the storage enterprise and arrays other than the E2800. See the SANtricity *Storage Manager Express Guide* for your operating system for installation instructions.

Steps

- From your browser, enter the following URL:

https://<DomainNameOrIPAddress>

IPAddress is the DHCP-assigned address for one of the storage array controllers.

The login page for the System Manager GUI appears.

- Enter the System Manager password.

When you open System Manager and no pools, volumes groups, workloads, or notifications have been configured, the Setup wizard launches.

- Use the Setup wizard to perform the following tasks:

- **Verify hardware (controllers and drives)** – Verify the number of controllers and drives in the storage array. Assign a name to the array.
 - **Verify hosts and operating systems** – Verify the host and operating system types that the storage array can access.
 - **Select applications** – Specify applications, such as Exchange or SQL. System Manager optimizes storage based on application type.
 - **Define workloads** – Set up workloads, which are storage objects that support applications. You define one or more workloads per application.
 - **Accept pools** – Accept the recommended pool configuration for the express installation method. A pool is a logical group of drives.
 - **Configure alerts** – Allow System Manager to automatically notifications when a problem occurs with the storage array.
 - **Enable AutoSupport** – Automatically monitor the health of your storage array and have dispatches sent to technical support.
4. Create volumes by going to **Storage > Volumes > Create > Volume**.

For more information, see the online help for SANtricity System Manager.

Related tasks

[*Configuring IP addresses using DHCP*](#) on page 10

Related information

[*SANtricity 11.30 Installing and Configuring for VMware Power Guide for Advanced Users*](#)

Discovering storage on the host

After assigning volumes to the host, you perform a rescan so that the host detects and configures the volumes for multipathing.

About this task

By default, an ESXi host automatically performs a rescan every five minutes. A volume might appear between the time you create it and assign it to a host, before you perform a manual rescan. Regardless, you can perform a manual rescan to ensure all volumes are configured properly.

Steps

1. Create one or more volumes and assign them to the ESXi host.
2. If using a vCenter Server, add the host to the server's inventory.
3. Use the vSphere Client or the vSphere Web Client to connect directly to the vCenter Server or to the ESXi host.
4. For instructions on how to perform a rescan of the storage on an ESXi host, search for the VMware Knowledge Base article on this topic.

Configuring storage on the host

You can use the storage assigned to an ESXi host as either a Virtual Machine File System (VMFS) datastore or a raw device mapping (RDM).

Before you begin

The volumes mapped to the ESXi host must have been discovered properly.

About this task

All 5.x versions of ESXi support VMFS versions 5 and 3. You must use VMFS version 5 unless the datastore also must be used by an ESX/ESXi 4.x host, which supports only VMFS version 3. All 6.x versions of ESXi support VMFS versions 5 and 3, although a new VMFS-3 cannot be created.

Choices

- For instructions on creating VMFS datastores using either the vSphere Client or the vSphere Web Client, see the VMware pubs webpage (<https://www.vmware.com/support/pubs/>) for documentation on this topic.
- For instructions on using volumes as RDMs using either the vSphere Client or the vSphere Web Client, see the VMware pubs webpage (<https://www.vmware.com/support/pubs/>) for documentation on this topic.

Verifying storage access on the host

Before you use a volume, you verify that the host can write data to the volume and read it back.


Step

1. Verify that the volume has been used as a Virtual Machine File System (VMFS) datastore or has been mapped directly to a VM for use as a raw device mapping (RDM).

FC worksheet

You can use this worksheet to record FC storage configuration information. You need this information to perform provisioning tasks.

The illustration shows a host connected to an E-Series storage array in two zones. One zone is indicated by the blue line; the other zone is indicated by the red line. Each zone contains one initiator port and all target ports.

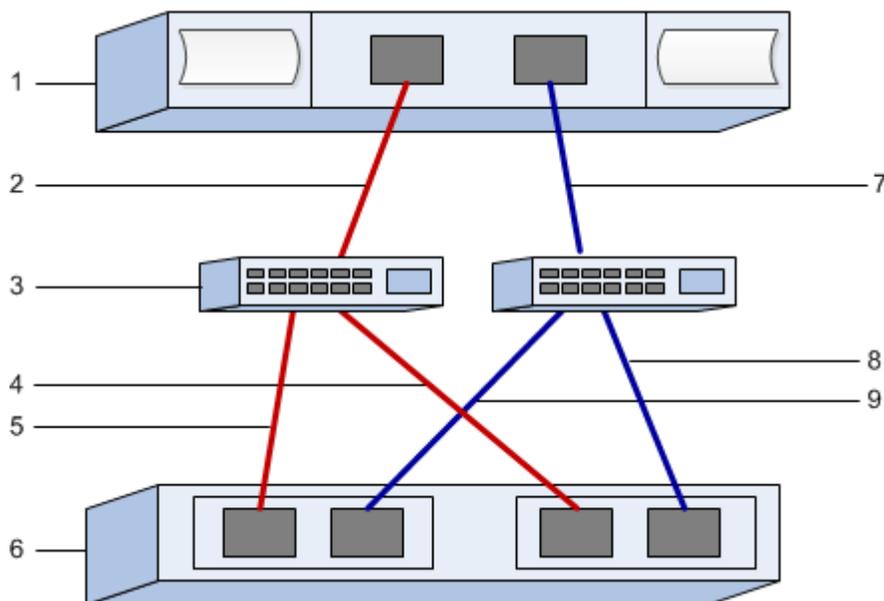

Host identifiers

Callout No.	Host (initiator) port connections	WWPN
1	Host	<i>not applicable</i>
2	Host port 0 to FC switch zone 0	
7	Host port 1 to FC switch zone 1	

Target identifiers

Callout No.	Array controller (target) port connections	WWPN
3	Switch	<i>not applicable</i>
6	Array controller (target)	<i>not applicable</i>
5	Controller A, port 1 to FC switch 1	
9	Controller A, port 2 to FC switch 2	
4	Controller B, port 1 to FC switch 1	
8	Controller B, port 2 to FC switch 2	

Mapping host


Mapping host name	
Host OS type	

iSCSI worksheet

You can use this worksheet to record iSCSI storage configuration information. You need this information to perform provisioning tasks.

Recommended configuration

Recommended configurations consist of two initiator ports and four target ports with one or more VLANs.

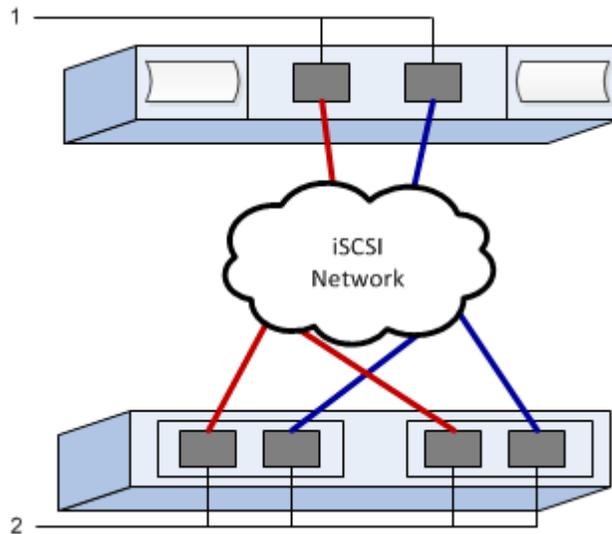

Target IQN

Callout No.	Target port connection	IQN
2	Target port	

Mappings host name

Callout No.	Host information	Name and type
1	Mappings host name	
	Host OS type	

SAS worksheet

You can use this worksheet to record SAS storage configuration information. You need this information to perform provisioning tasks.

Host Identifiers

Host (initiator) port connections	SAS address
Host (initiator) port connected to Controller A	
Host (initiator) port connected to Controller B	

Target Identifiers

Recommended configurations consist of two target ports.

Mappings Host

Mappings Host Name	
Host OS Type	

Where to find additional information

Use the resources listed here if you need additional information. You can also use the online help for SANtricity System Manager.

- [SANtricity 11.30 Installing and Configuring for VMware Power Guide for Advanced Users](#) describes:
 - Software installation options
 - Configuration options
 - Multipath options
 - Installation on a boot device
- Online help describes how to use SANtricity System Manager to complete configuration and storage management tasks. It is available within the product and as a PDF download.
- [NetApp Knowledgebase](#) (a database of articles) provides troubleshooting information, FAQs, and instructions for a wide range of NetApp products and technologies.
- **VMware Configuration Maximums** describe how to configure virtual and physical storage to stay within the allowed maximums that ESX/ESXi supports.
 - vSphere 6.0 - search vmware.com for "vsphere 60 configuration maximums."
 - vSphere 5.5 - search vmware.com for "vsphere 55 configuration maximums."
 - vSphere 5.1 - search vmware.com for "vsphere 51 configuration maximums."
- **VMware iSCSI Port Binding** provides considerations for using software iSCSI port binding in ESX/ESXi. Search the VMware Knowledge Base for this topic.
- Other VMware Publications. Search vmware.com for ESXi vCenter Server documentation.
- For additional documentation and instructions for E-Series products, including SANtricity software, go to the [NetApp E-Series and EF-Series Systems Documentation Center](#).

Copyright information

Copyright © 1994–2016 NetApp, Inc. All rights reserved. Printed in the U.S.

No part of this document covered by copyright may be reproduced in any form or by any means—graphic, electronic, or mechanical, including photocopying, recording, taping, or storage in an electronic retrieval system—without prior written permission of the copyright owner.

Software derived from copyrighted NetApp material is subject to the following license and disclaimer:

THIS SOFTWARE IS PROVIDED BY NETAPP "AS IS" AND WITHOUT ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, WHICH ARE HEREBY DISCLAIMED. IN NO EVENT SHALL NETAPP BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

NetApp reserves the right to change any products described herein at any time, and without notice. NetApp assumes no responsibility or liability arising from the use of products described herein, except as expressly agreed to in writing by NetApp. The use or purchase of this product does not convey a license under any patent rights, trademark rights, or any other intellectual property rights of NetApp.

The product described in this manual may be protected by one or more U.S. patents, foreign patents, or pending applications.

RESTRICTED RIGHTS LEGEND: Use, duplication, or disclosure by the government is subject to restrictions as set forth in subparagraph (c)(1)(ii) of the Rights in Technical Data and Computer Software clause at DFARS 252.277-7103 (October 1988) and FAR 52-227-19 (June 1987).

Trademark information

NetApp, the NetApp logo, Go Further, Faster, AltaVault, ASUP, AutoSupport, Campaign Express, Cloud ONTAP, Clustered Data ONTAP, Customer Fitness, Data ONTAP, DataMotion, Fitness, Flash Accel, Flash Cache, Flash Pool, FlashRay, FlexArray, FlexCache, FlexClone, FlexPod, FlexScale, FlexShare, FlexVol, FPolicy, GetSuccessful, LockVault, Manage ONTAP, Mars, MetroCluster, MultiStore, NetApp Insight, OnCommand, ONTAP, ONTAPI, RAID DP, RAID-TEC, SANtricity, SecureShare, Simplicity, Simulate ONTAP, Snap Creator, SnapCenter, SnapCopy, SnapDrive, SnapIntegrator, SnapLock, SnapManager, SnapMirror, SnapMover, SnapProtect, SnapRestore, Snapshot, SnapValidator, SnapVault, StorageGRID, Tech OnTap, Unbound Cloud, and WAFL and other names are trademarks or registered trademarks of NetApp, Inc., in the United States, and/or other countries. All other brands or products are trademarks or registered trademarks of their respective holders and should be treated as such. A current list of NetApp trademarks is available on the web.

<http://www.netapp.com/us/legal/netapptmlist.aspx>

How to send comments about documentation and receive update notifications

You can help us to improve the quality of our documentation by sending us your feedback. You can receive automatic notification when production-level (GA/FCS) documentation is initially released or important changes are made to existing production-level documents.

If you have suggestions for improving this document, send us your comments by email.

[*doccomments@netapp.com*](mailto:doccomments@netapp.com)

To help us direct your comments to the correct division, include in the subject line the product name, version, and operating system.

If you want to be notified automatically when production-level documentation is released or important changes are made to existing production-level documents, follow Twitter account @NetAppDoc.

You can also contact us in the following ways:

- NetApp, Inc., 495 East Java Drive, Sunnyvale, CA 94089 U.S.
- Telephone: +1 (408) 822-6000
- Fax: +1 (408) 822-4501
- Support telephone: +1 (888) 463-8277