



OnCommand® Cloud Manager 3.3

Provisioning NFS Volumes Using the Volume View

June 2017 | 215-12282_A0
doccomments@netapp.com

Contents

Logging in to Cloud Manager	4
Creating NFS volumes	5
Mounting volumes to Linux hosts	8
Cloning volumes	9
Managing data access to volumes	10
Changing the underlying AWS disk for a volume	11
Deleting volumes	12
Viewing and modifying AWS resources	13
Changing to the Storage System View	14
Copyright information	15
Trademark information	16
How to send comments about documentation and receive update notifications	17
Index	18

Logging in to Cloud Manager

You can log in to Cloud Manager from any web browser that has a connection to the Cloud Manager host.

Steps


1. Open a web browser and enter the following URL:

`https://ipaddress:port`

ipaddress can be `localhost`, a private IP address, or a public IP address, depending on the configuration of the Cloud Manager host. For example, if Cloud Manager is in the public cloud without a public IP address, you must enter a private IP address from a host that has a connection to the Cloud Manager host.

port is required if you changed the default HTTP (80) or HTTPS (443) ports. For example, if the HTTPS port was changed to 8443, you would enter **`https://ipaddress:8443`**

After you enter the URL, the Cloud Manager log in screen appears:

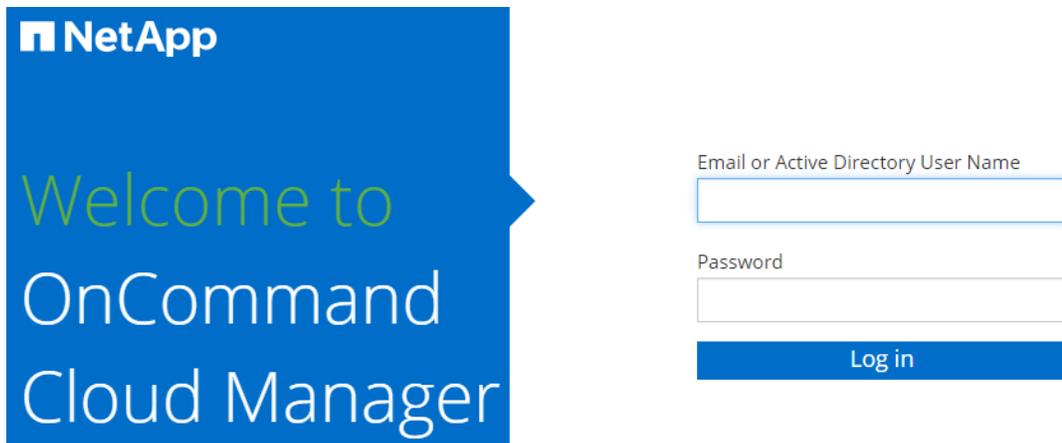

NetApp

Welcome to
OnCommand
Cloud Manager

Email or Active Directory User Name

Password

Log in

2. Enter your credentials, and then click **Log in**.

Creating NFS volumes

You can use Cloud Manager to create NFS volumes that provide enterprise-class features on top of AWS storage.

About this task

NetApp video: [Creating an ONTAP Cloud HA volume from the Cloud Manager Volume View](#)

Steps

1. In the **Volumes** tab, click **Create New Volume**.
2. On the **Create New Volume** page, select a volume type:

Option	Description
Create Volume	Creates a volume attached to a single AWS instance.
Create HA volume	Creates a volume attached to a single AWS instance and mirrored to another instance to provide high availability in case of failures. Click the Info icon to see additional details about the instances required for an HA volume.

3. If you chose **Create Volume**, specify details for your first volume, and then click **Create**.

The following table describes fields for which you might need guidance:

Field	Description
Size	<p>The maximum size for the volume depends on the capacity available in existing storage systems.</p> <p>Thin provisioning is automatically enabled on the volume, which enables you to create a volume that is bigger than the physical storage currently available to it. Instead of preallocating storage space, space is allocated to each volume as data is written.</p>
AWS Disk Type	<p>You should choose the disk that meets your requirements for both performance and cost.</p> <ul style="list-style-type: none"> • General Purpose SSD disks balance cost and performance for a broad range of workloads. Performance is defined in terms of IOPS. • Throughput Optimized HDD disks are for frequently accessed workloads that require fast and consistent throughput at a lower price. • Cold HDD disks are meant for backups, or infrequently accessed data, because the performance is very low. Like Throughput Optimized HDD disks, performance is defined in terms of throughput. <p><i>AWS Documentation: EBS Volume Types</i></p>

The following image shows the Create Volume page filled out:

6 | Provisioning NFS volumes using the Volume View

Details		Location	Edit
Volume Name	Size (GB)	AWS Region	
vol1	500	US East N. Virginia	
AWS Disk Type		VPC	
General Purpose (SSD)		vpc-a6c1eac2 172.32.0.0/16	
		Subnet	
		172.32.0.0/24	

4. If you chose **Create HA volume**, specify details for the volume, and then click **Create**.

The following table describes fields for which you might need guidance:

Field	Description
Size	<p>The maximum size for the volume depends on the capacity available in existing storage systems.</p> <p>Thin provisioning is automatically enabled on the volume, which enables you to create a volume that is bigger than the physical storage currently available to it. Instead of preallocating storage space, space is allocated to each volume as data is written.</p>
AWS Disk Type	<p>You should choose the disk that meets your requirements for both performance and cost.</p> <ul style="list-style-type: none"> General Purpose SSD disks balance cost and performance for a broad range of workloads. Performance is defined in terms of IOPS. Throughput Optimized HDD disks are for frequently accessed workloads that require fast and consistent throughput. <p><i>AWS Documentation: EBS Volume Types</i></p>
Location	<p>You should choose a VPC that includes three subnets in three separate Availability Zones.</p>
Nodes and Mediator	<p>If possible, Cloud Manager chooses separate Availability Zones for each instance because it is the supported and optimal configuration.</p>
Floating IP	<p>The IP addresses must be outside of the CIDR block for all VPCs in the region.</p>
Route Table	<p>If you have more than one route table, it is very important to select the correct route tables. Otherwise, some clients might not have access to the ONTAP Cloud HA pair.</p> <p><i>Amazon Web Services (AWS) Documentation: Route Tables</i></p>

The following image shows the Nodes and Mediator page. Each instance is in a separate Availability Zone.

Nodes & Mediator

[Edit](#)

Node 1	Availability Zone us-east-1d	Subnet 172.31.0.0/20	
Node 2	Availability Zone us-east-1c	Subnet 172.31.16.0/20	
Mediator	Availability Zone us-east-1b	Subnet 172.31.32.0/20	Key Pair EranVirginia

Result

Cloud Manager creates the volume on an existing system or on a new system. If a new system is required, creating the volume can take approximately 25 minutes.

After you finish

Mount the volume to hosts.

Related information

[Learning about Cloud Manager and ONTAP Cloud: How the Volume View works](#)

Mounting volumes to Linux hosts

After you create a volume, you should mount it to your hosts so that they can access the volume.

Steps

1. In the **Volumes** tab, place your mouse cursor over the volume, select the menu icon, and then click **Mount**.
2. Click **Copy**.
3. On your Linux hosts, modify the copied text by changing the destination directory, and then enter the command to mount the volume.

Cloning volumes

If you need an instantaneous copy of your data without using a lot of disk space, you can create a clone of an existing volume. The cloned volume is a writable, point-in-time copy that is space-efficient because it uses a small amount of space for metadata, and then only consumes additional space as data is changed or added.

Steps

1. In the **Volumes** tab, place your mouse cursor over the volume, select the menu icon, and then click **Clone**.
2. Modify the name of the cloned volume, if needed, and then click **Clone**.

Result

Cloud Manager creates a new volume that is a clone of an existing volume.

Managing data access to volumes

When you create a volume, Cloud Manager makes the volume available to all EC2 instances in the VPC in which the volume was created. You can modify this default value if you need to restrict data access to the volume.

Steps

1. In the **Volumes** tab, place your mouse cursor over the volume, select the menu icon, and then click **Manage Access**.
2. Modify the volume access list, and then click **Save**.

Changing the underlying AWS disk for a volume

You can change the underlying AWS disk that a volume uses to provide storage. For example, if higher performance is needed, you can change from a Throughput Optimized HDD to a General Purpose SSD.

Steps

1. In the **Volumes** tab, place your mouse cursor over the volume, select the menu icon, and then click **Change Disk**.
2. Select the AWS disk type and click **Change**.

Result

Cloud Manager moves the volume to an existing aggregate that uses the selected disk type or it creates a new aggregate for the volume.

Deleting volumes

You can delete volumes that you no longer need.

Steps

1. In the **Volumes** tab, place your mouse cursor over the volume, select the menu icon, and then click **Delete**.
2. Click **Delete** to confirm that you want to delete the volume.

Viewing and modifying AWS resources


When you create a new volume, Cloud Manager allocates the AWS instances and EBS storage required for that volume. If required, you can view details about AWS instances and EBS storage, change instance types, and turn instances off and on.

Steps

1. Click **AWS Resources**.

The list of AWS instances displays. You can view details such as instance type, AWS location, and the volumes attached to the instance.

2. If required, select the menu icon next to the **Status** column, and then choose one of the available actions:

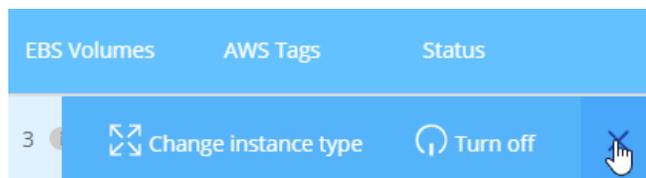

Changing to the Storage System View

Cloud Manager provides two management views for its graphical interface: the Storage System View for managing storage systems across a hybrid cloud and the Volume View for creating volumes in AWS without having to manage storage systems. You can switch between these views, but those instances should be rare because a single view should meet your needs.

Steps

1. In the upper right of the Cloud Manager console, click the menu, and then select **View Selection**.
2. On the **View Selection** page, select **Storage System View**, and then click **Switch**.

Result

Cloud Manager switches to the Storage System View.

Here are a few tips when using the Storage System View:

- The volumes that you created are hosted by one or more ONTAP Cloud instances. The default name for each instance includes the date and time that Cloud Manager created the instance (for example, “COT_17_44_40_Mar_17_16”).
- It is possible to create additional user accounts in the Storage System View. However, only a user account with the Cloud Manager Admin role can access the Volume View.

Related information

[Learning about Cloud Manager and ONTAP Cloud: How the Storage System View works](#)

Copyright information

Copyright © 1994–2017 NetApp, Inc. All rights reserved. Printed in the U.S.

No part of this document covered by copyright may be reproduced in any form or by any means—graphic, electronic, or mechanical, including photocopying, recording, taping, or storage in an electronic retrieval system—without prior written permission of the copyright owner.

Software derived from copyrighted NetApp material is subject to the following license and disclaimer:

THIS SOFTWARE IS PROVIDED BY NETAPP "AS IS" AND WITHOUT ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, WHICH ARE HEREBY DISCLAIMED. IN NO EVENT SHALL NETAPP BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

NetApp reserves the right to change any products described herein at any time, and without notice. NetApp assumes no responsibility or liability arising from the use of products described herein, except as expressly agreed to in writing by NetApp. The use or purchase of this product does not convey a license under any patent rights, trademark rights, or any other intellectual property rights of NetApp.

The product described in this manual may be protected by one or more U.S. patents, foreign patents, or pending applications.

RESTRICTED RIGHTS LEGEND: Use, duplication, or disclosure by the government is subject to restrictions as set forth in subparagraph (c)(1)(ii) of the Rights in Technical Data and Computer Software clause at DFARS 252.277-7103 (October 1988) and FAR 52-227-19 (June 1987).

Trademark information

Active IQ, AltaVault, Arch Design, ASUP, AutoSupport, Campaign Express, Clustered Data ONTAP, Customer Fitness, Data ONTAP, DataMotion, Element, Fitness, Flash Accel, Flash Cache, Flash Pool, FlexArray, FlexCache, FlexClone, FlexPod, FlexScale, FlexShare, FlexVol, FPolicy, Fueled by SolidFire, GetSuccessful, Helix Design, LockVault, Manage ONTAP, MetroCluster, MultiStore, NetApp, NetApp Insight, OnCommand, ONTAP, ONTAPI, RAID DP, RAID-TEC, SANscreen, SANshare, SANtricity, SecureShare, Simplicity, Simulate ONTAP, Snap Creator, SnapCenter, SnapCopy, SnapDrive, SnapIntegrator, SnapLock, SnapManager, SnapMirror, SnapMover, SnapProtect, SnapRestore, Snapshot, SnapValidator, SnapVault, SolidFire, SolidFire Helix, StorageGRID, SyncMirror, Tech OnTap, Unbound Cloud, and WAFL and other names are trademarks or registered trademarks of NetApp, Inc., in the United States, and/or other countries. All other brands or products are trademarks or registered trademarks of their respective holders and should be treated as such. A current list of NetApp trademarks is available on the web.

<http://www.netapp.com/us/legal/netapptmlist.aspx>

How to send comments about documentation and receive update notifications

You can help us to improve the quality of our documentation by sending us your feedback. You can receive automatic notification when production-level (GA/FCS) documentation is initially released or important changes are made to existing production-level documents.

If you have suggestions for improving this document, send us your comments by email.

[*doccomments@netapp.com*](mailto:doccomments@netapp.com)

To help us direct your comments to the correct division, include in the subject line the product name, version, and operating system.

If you want to be notified automatically when production-level documentation is released or important changes are made to existing production-level documents, follow Twitter account @NetAppDoc.

You can also contact us in the following ways:

- NetApp, Inc., 495 East Java Drive, Sunnyvale, CA 94089 U.S.
- Telephone: +1 (408) 822-6000
- Fax: +1 (408) 822-4501
- Support telephone: +1 (888) 463-8277

Index

A

access, volumes
managing [10](#)

C

clones, volume
creating [9](#)
comments
how to send feedback about documentation [17](#)
console
logging in to Cloud Manager [4](#)

D

data access, volumes
managing [10](#)
disk type
changing [11](#)
documentation
how to receive automatic notification of changes to [17](#)
how to send feedback about [17](#)

E

EBS storage
viewing [13](#)

F

feedback
how to send comments about documentation [17](#)

I

information
how to send feedback about improving
documentation [17](#)
instances
changing the type of [13](#)
turning off [13](#)
turning on [13](#)

L

logging in

to Cloud Manager [4](#)

M

management views
changing [14](#)

N

NFS volumes
creating [5](#)

O

OnCommand Cloud Manager
logging in [4](#)

S

Storage System View
switching to [14](#)
suggestions
how to send feedback about documentation [17](#)

T

Twitter
how to receive automatic notification of
documentation changes [17](#)

V

views, management
switching between [14](#)
volume size
considerations for specifying [5](#)
Volume View
switching to [14](#)
volumes
changing disk type for [11](#)
cloning [9](#)
deleting [12](#)
managing data access [10](#)
mounting [8](#)
volumes, NFS
creating [5](#)